

BRICK LIGHT 6W

LED Brick Light

Outdoor Luminaire

Product Code:

410L6HM.NGG

6W - 300lm - 3000K - CRI>70 Ra



Technical Specifications

Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	220-240 VAC, 50Hz
Rated Input Wattage	6W ± 10%
Rated Input Current	0.030 Amp (Nominal)
Power Factor	≥0.9
ATHD	<30%
Rated Luminous Flux	300 lm (tolerance as per BIS)
Rated Luminaire Efficacy	50 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Die Cast Aluminium with Powder Coating
Lens / Reflector	Frosted Tempered Glass Diffuser
Mounting	Recessed


Protections

Over Voltage Protection	Withstand upto 300V/AC for 4 Hrs.
Surge Protection	±2.0KV
Ingress Protection (IP Rating)	IP54
Impact Protection (IK Rating)	IK03
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Product Dimensions (L x W x H), Cutout Size (LxW)

240 X 104 X 70 mm (Tol.±5 mm), 230 X 88 mm

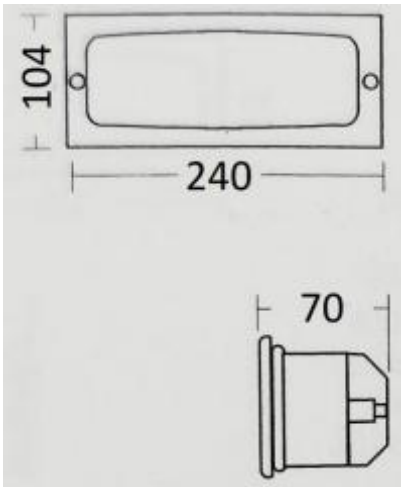

Applications

Applications Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.