PRODUCT INFORMATION
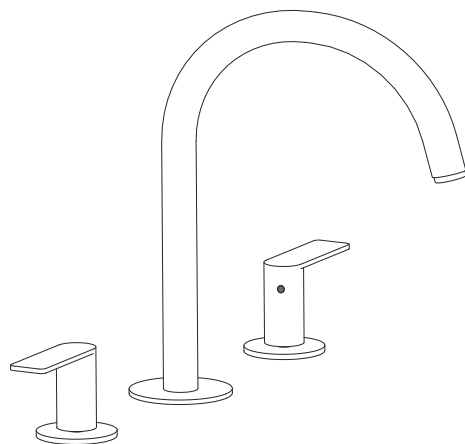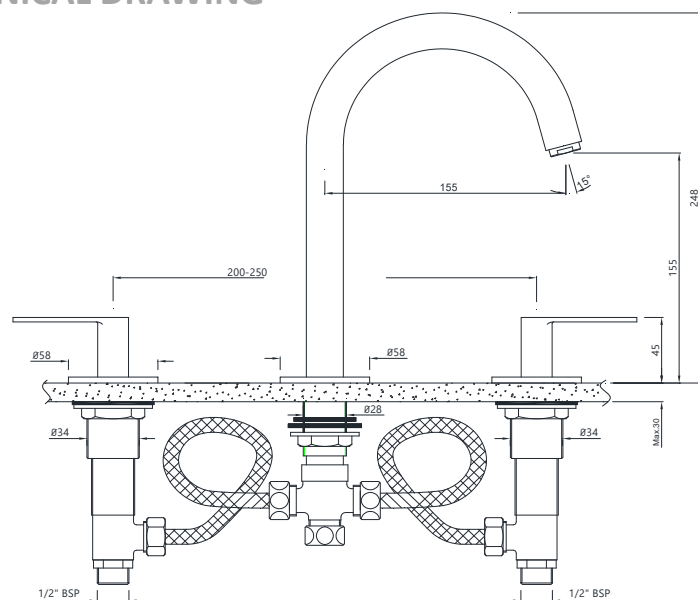
LAG-91189PSL

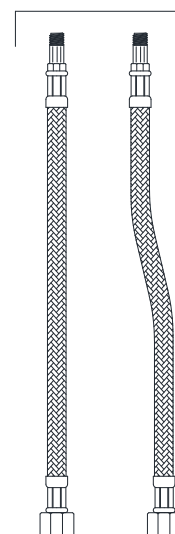## TEMP.& WATER PRESSURE REQUIREMENTS

Working Pressure: 1~3 bar

Required Temperature: 5-65℃

Note: Above values are the recommended values for Getting Conventional Outputs.
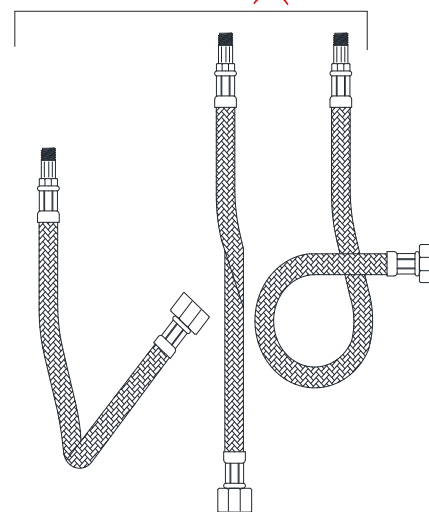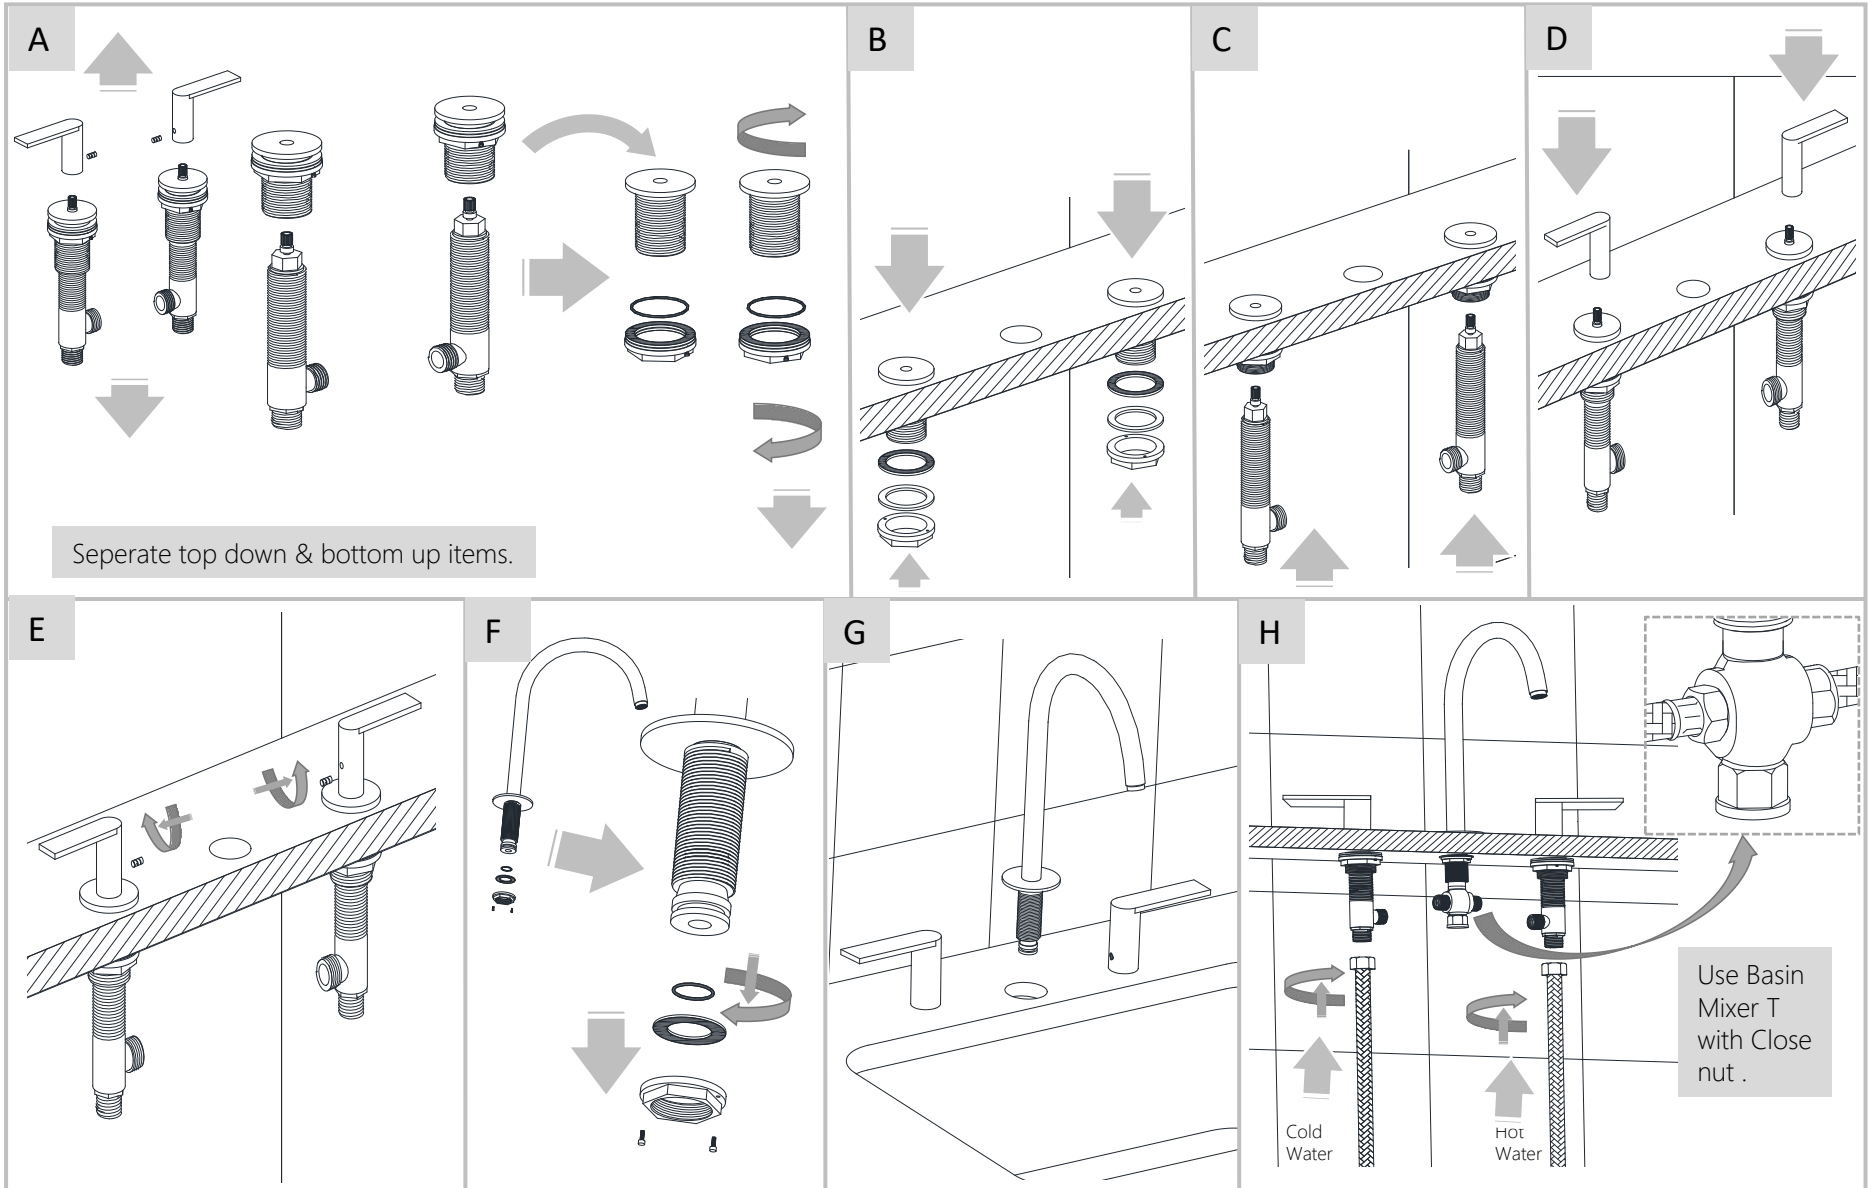
TECHNICAL DRAWING

155

248

155

45

Max.30

200-250

Ø58

Ø58

Ø34

Ø28

Ø34

15°

1/2" BSP

1/2" BSP

TAKE CARE DURING CONNECTION'S

DO ✔

DON'T ✘

HOW TO INSTALL

A

Seperate top down & bottom up items.

B

C

D

E

F

G

H

Use Basin Mixer T with Close nut .

Cold Water

Hot Water

HOW TO OPERATE

I

Connect Cold & Hot Water Connections

Hot Water

Cold Water

Rotate Reverse for Close

CLEANING INSTRUCTIONS

LIQUID SOAP PH-5-7

Apply soft cotton cloth

WATER

Apply soft cotton cloth

❌ DON'T

POWDER SOAP

❌ DON'T Don't apply Scrub
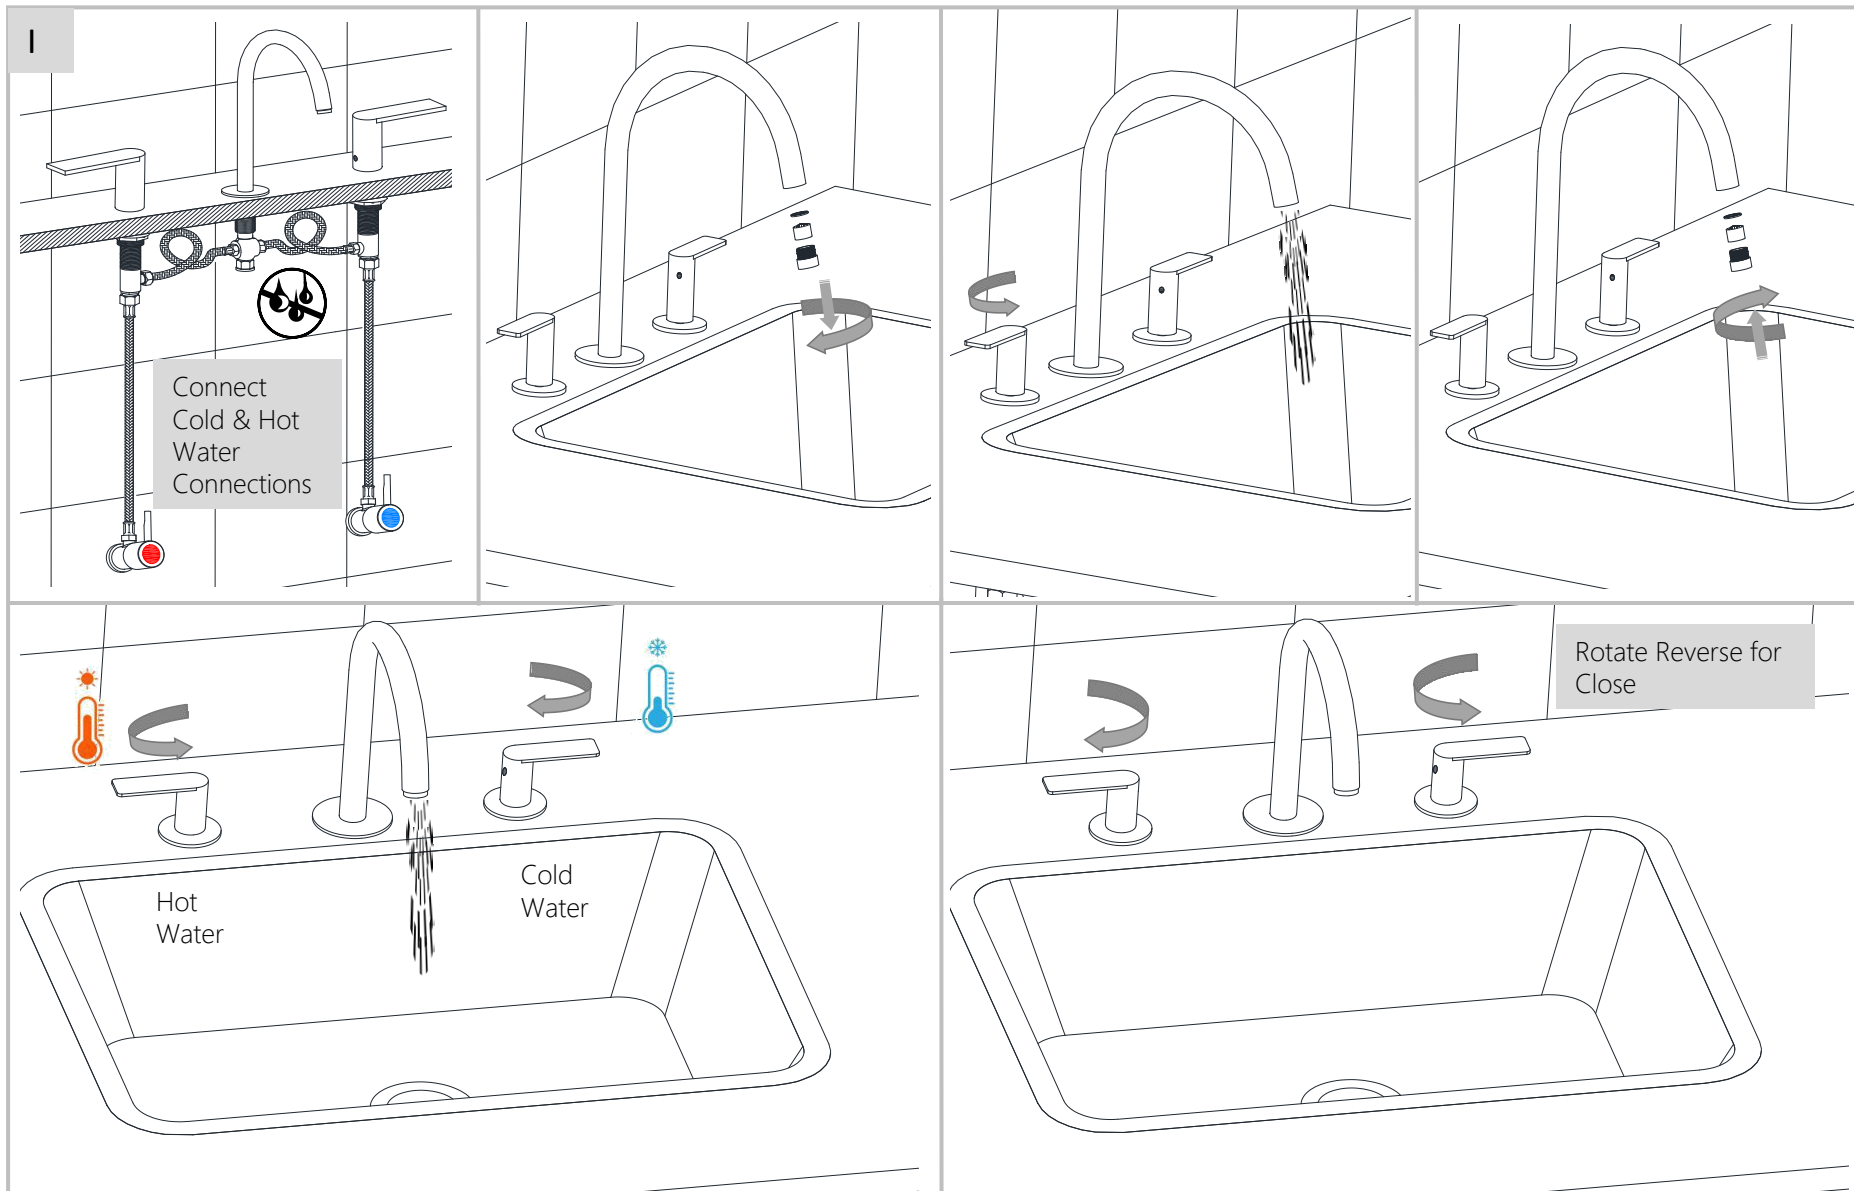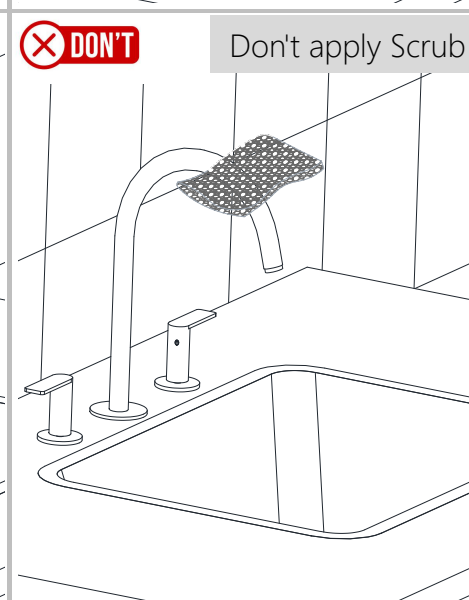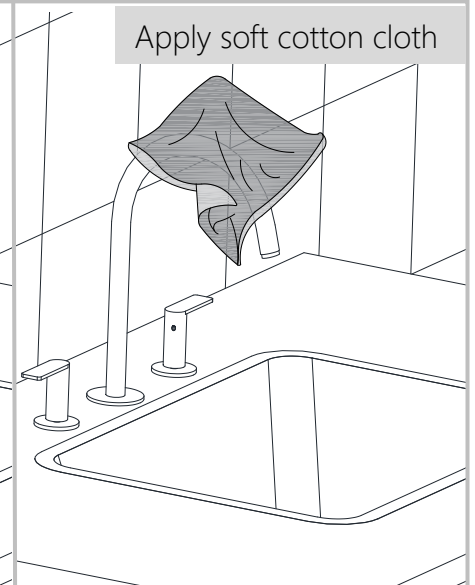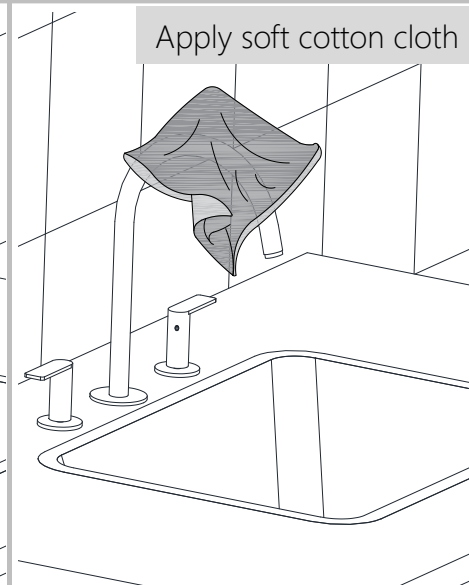
Steps & Cleaning agents requirements for Aerator Cleaning.

DE-SCALE

SOAP

Aerator | 1 hour Dip | De-Scale Water | Liquid Soap PH-5-7