





## FLP-5165PM

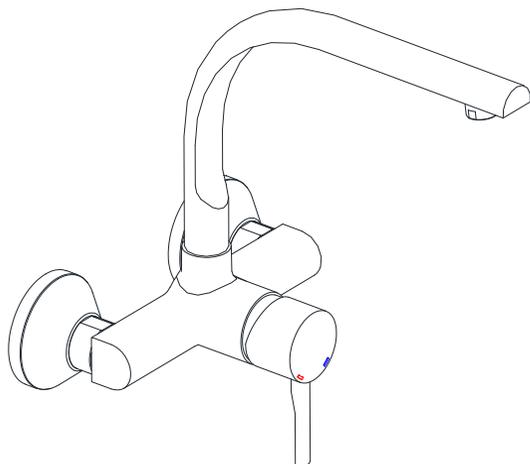

## TECHNICAL DRAWING

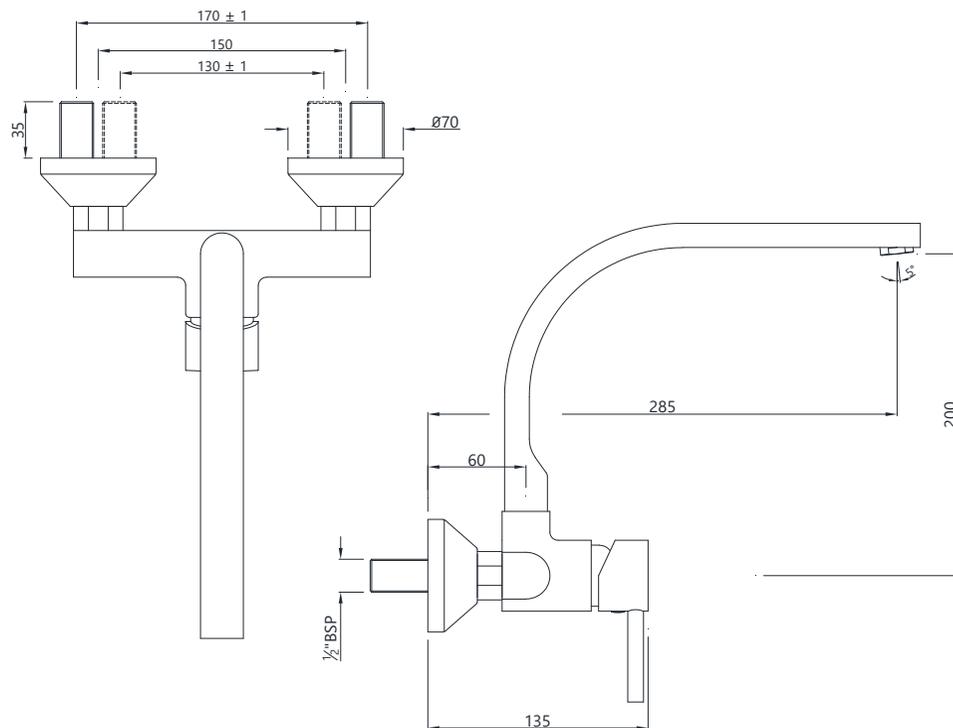

## TEMP.&amp; WATER PRESSURE REQUIREMENTS





Working Pressure: 1~3 bar




Required Temperature: 5-65°C






Note: Above are the recommended values for getting Conventional Output.

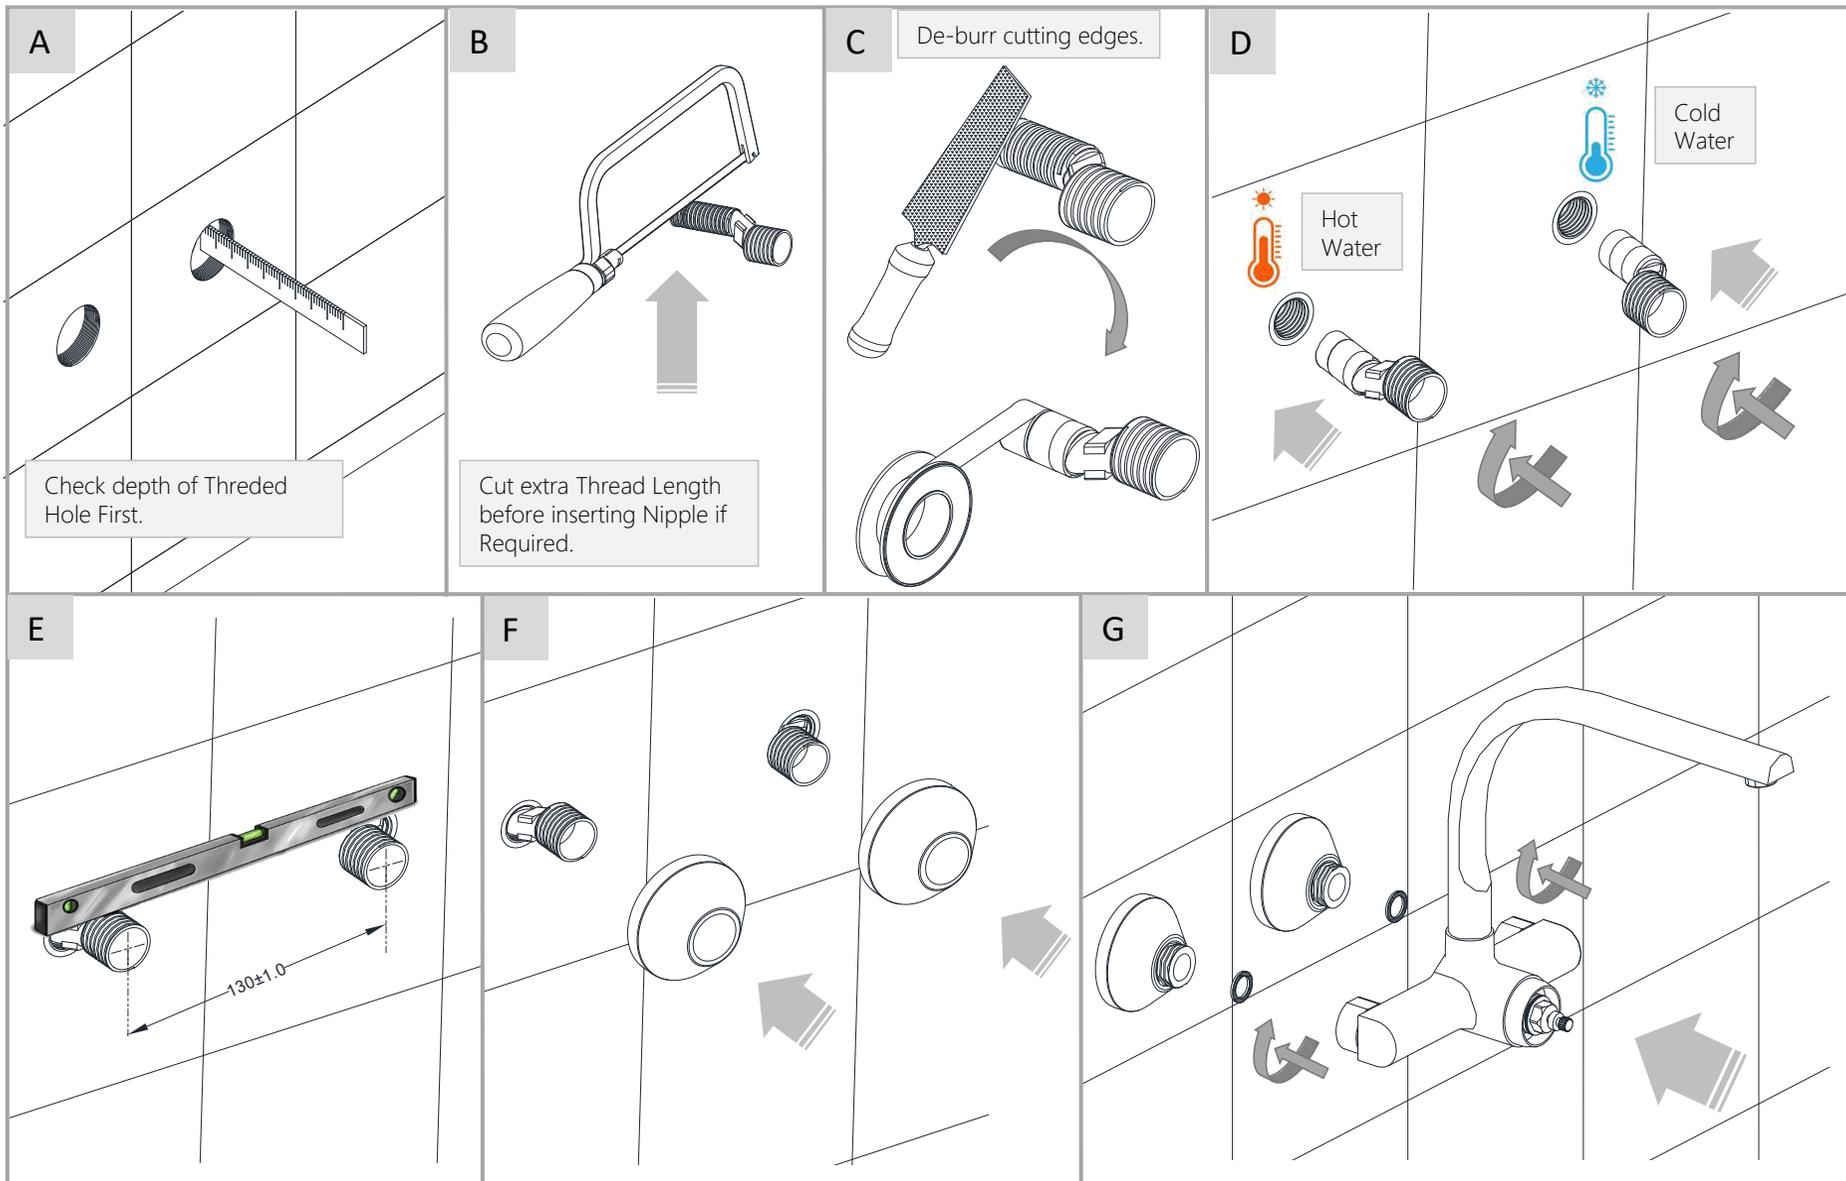

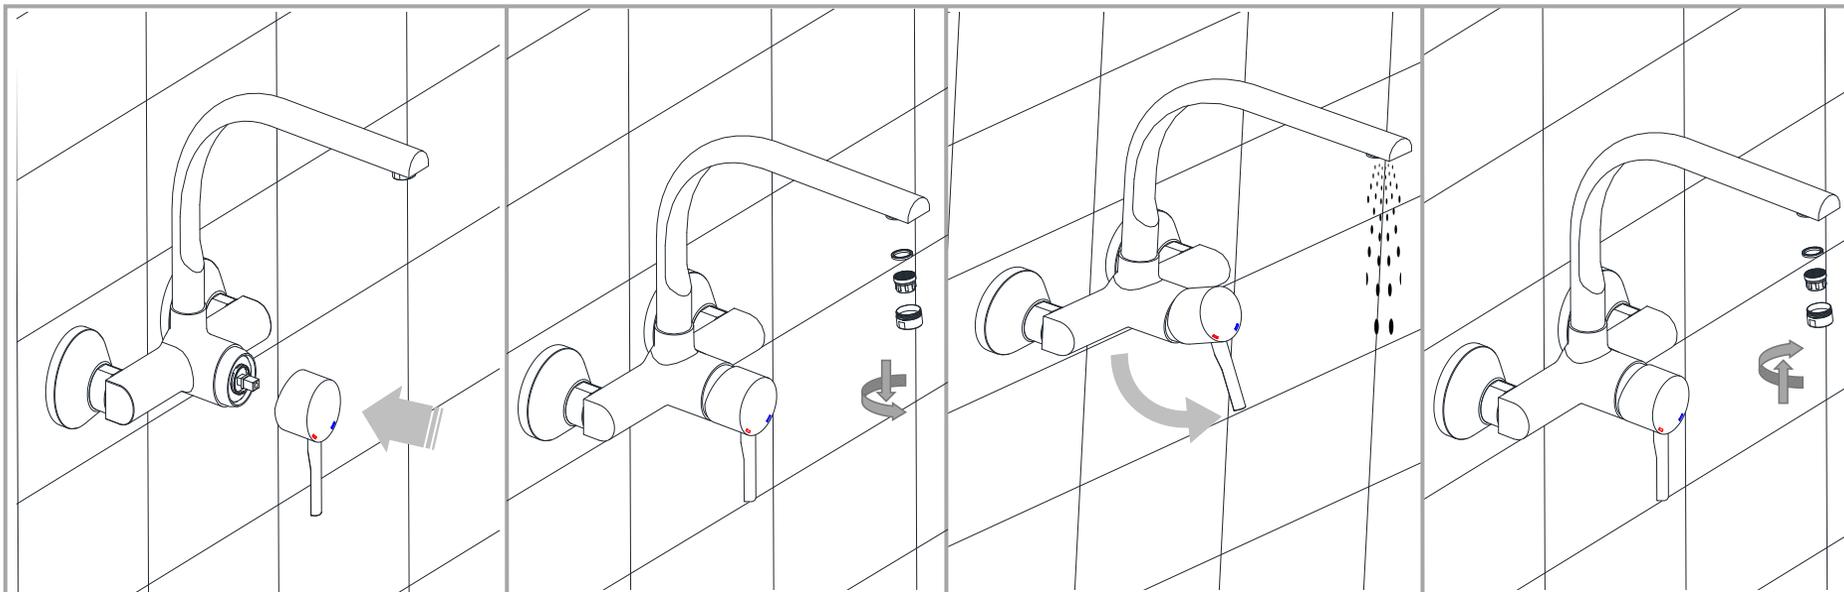

Spout can be swing around 180° During run time.

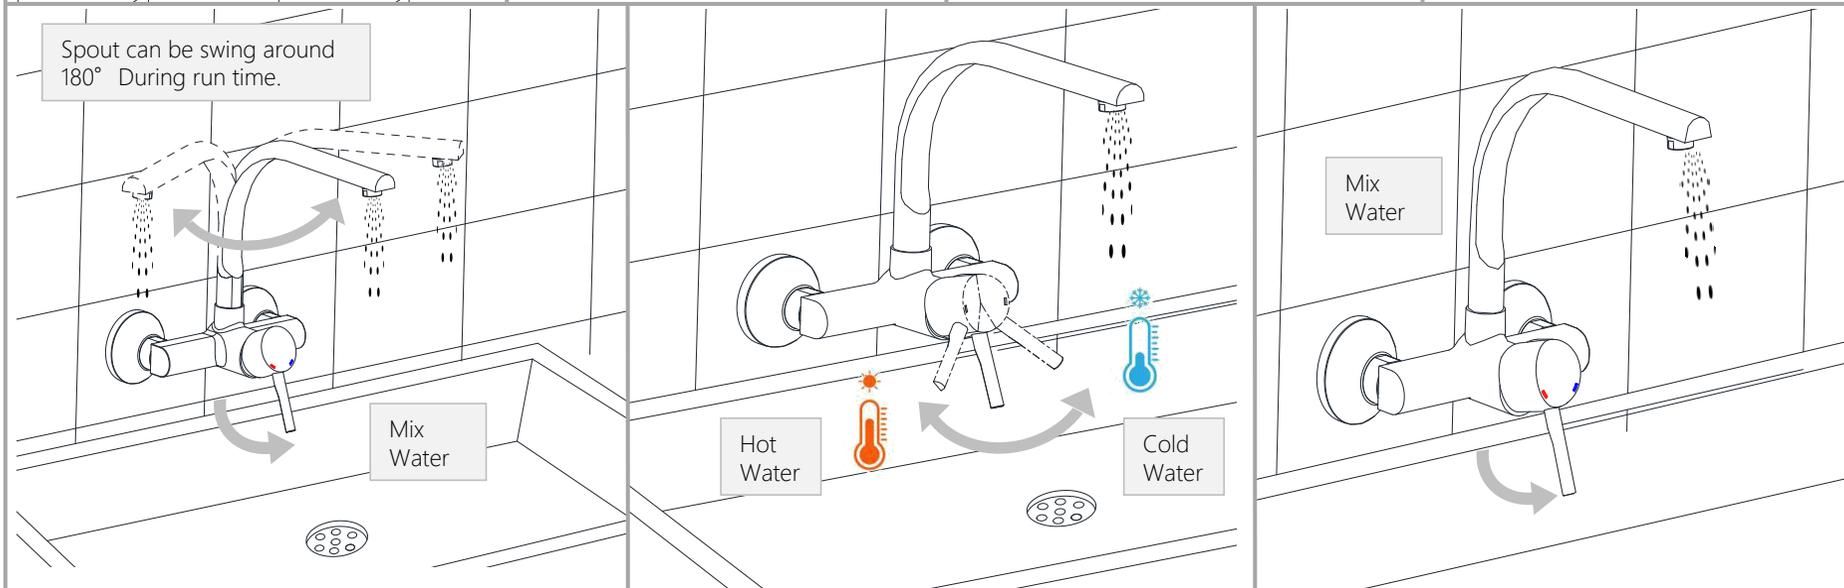

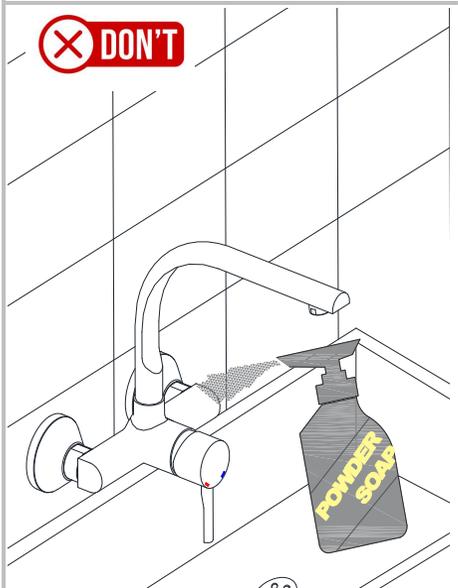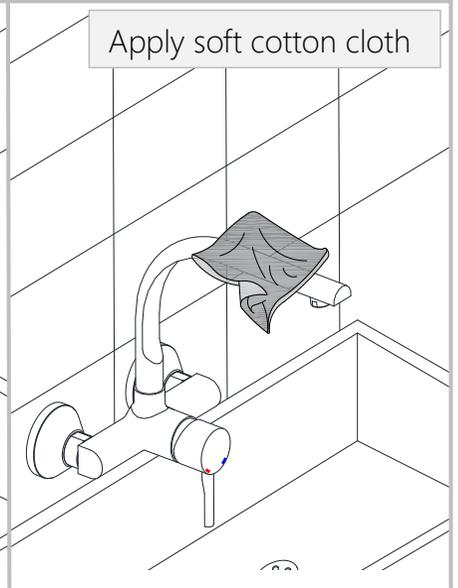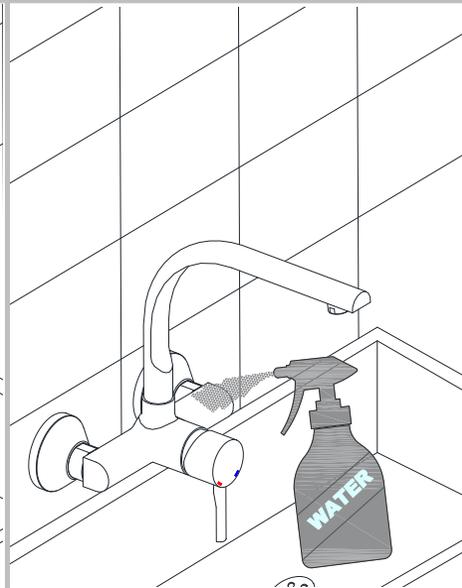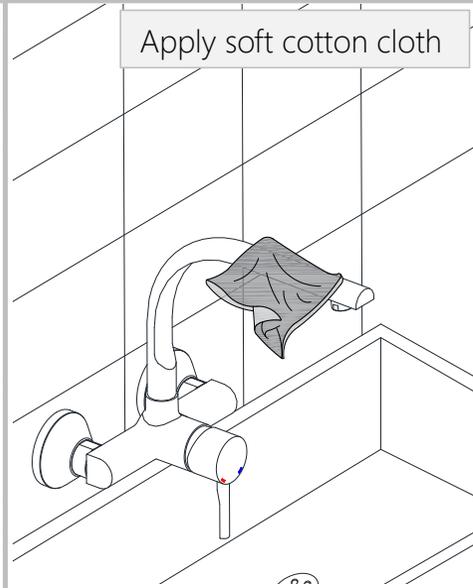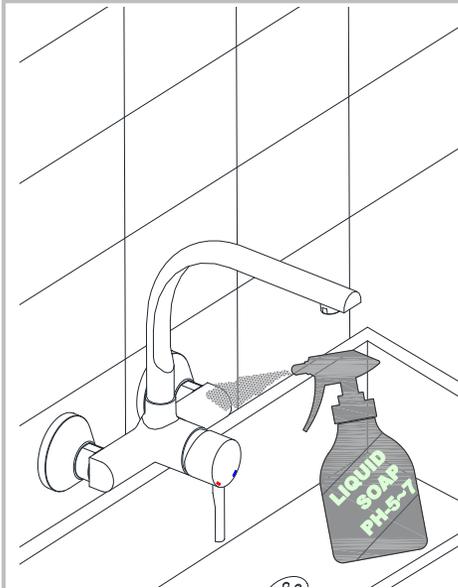

Steps & Cleaning agents requirements for Aerator Cleaning.

