FLP-5273PM

TECHNICAL DRAWING

200 ± 1.0
180 ± 1.0
160 ± 1.0

Max. 160

ø70

ø70

½" BSP

85

35   70   150
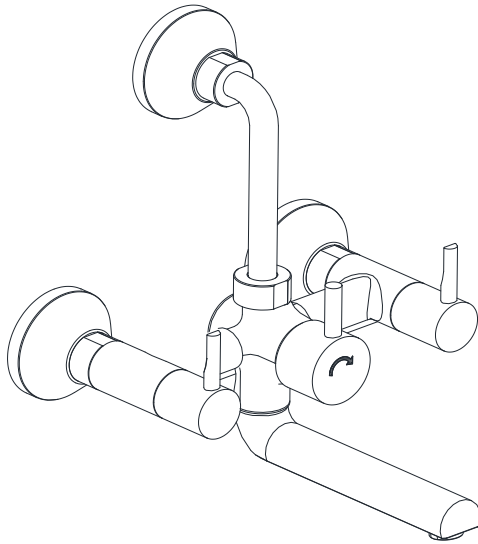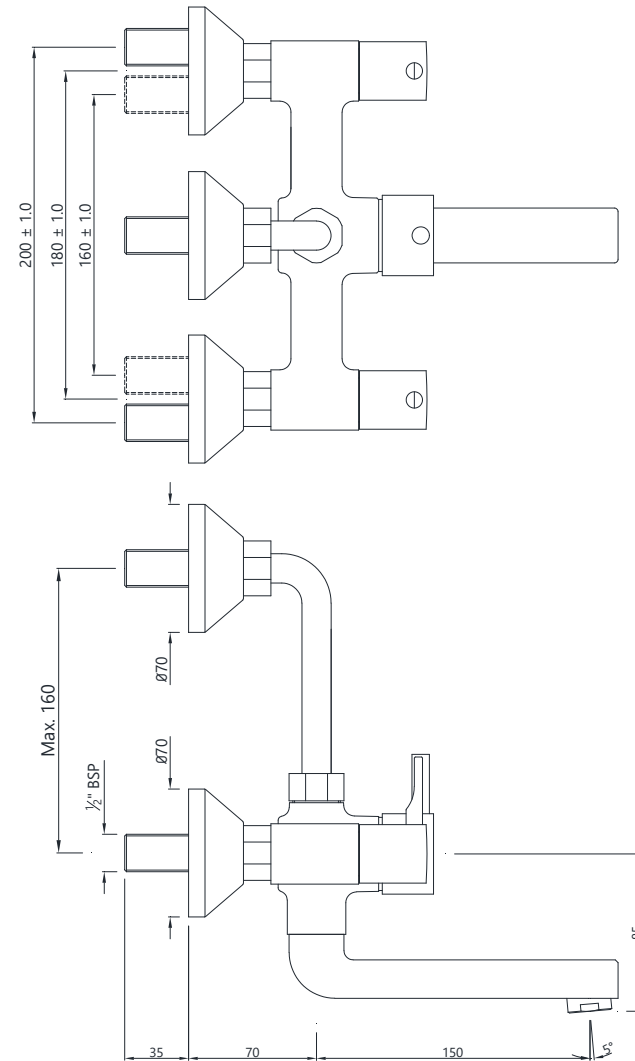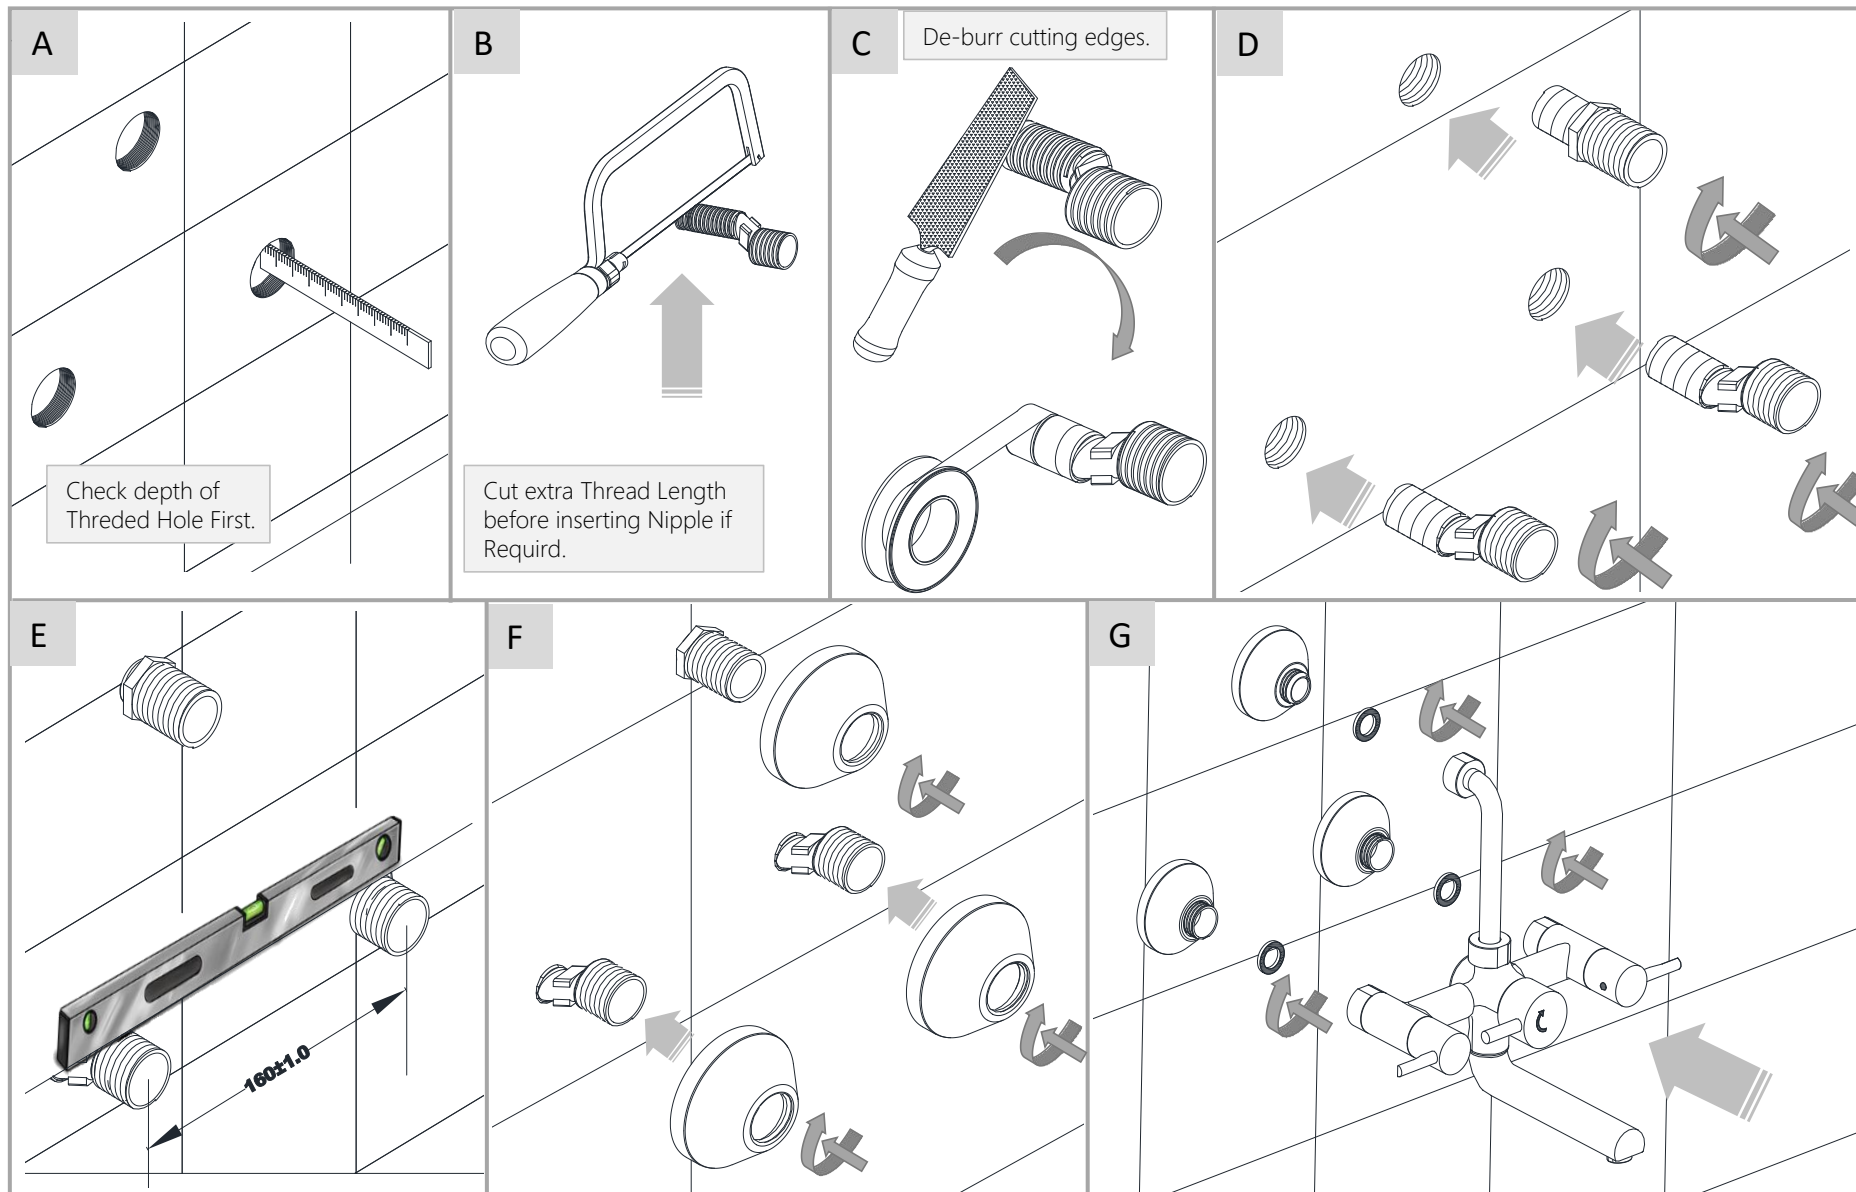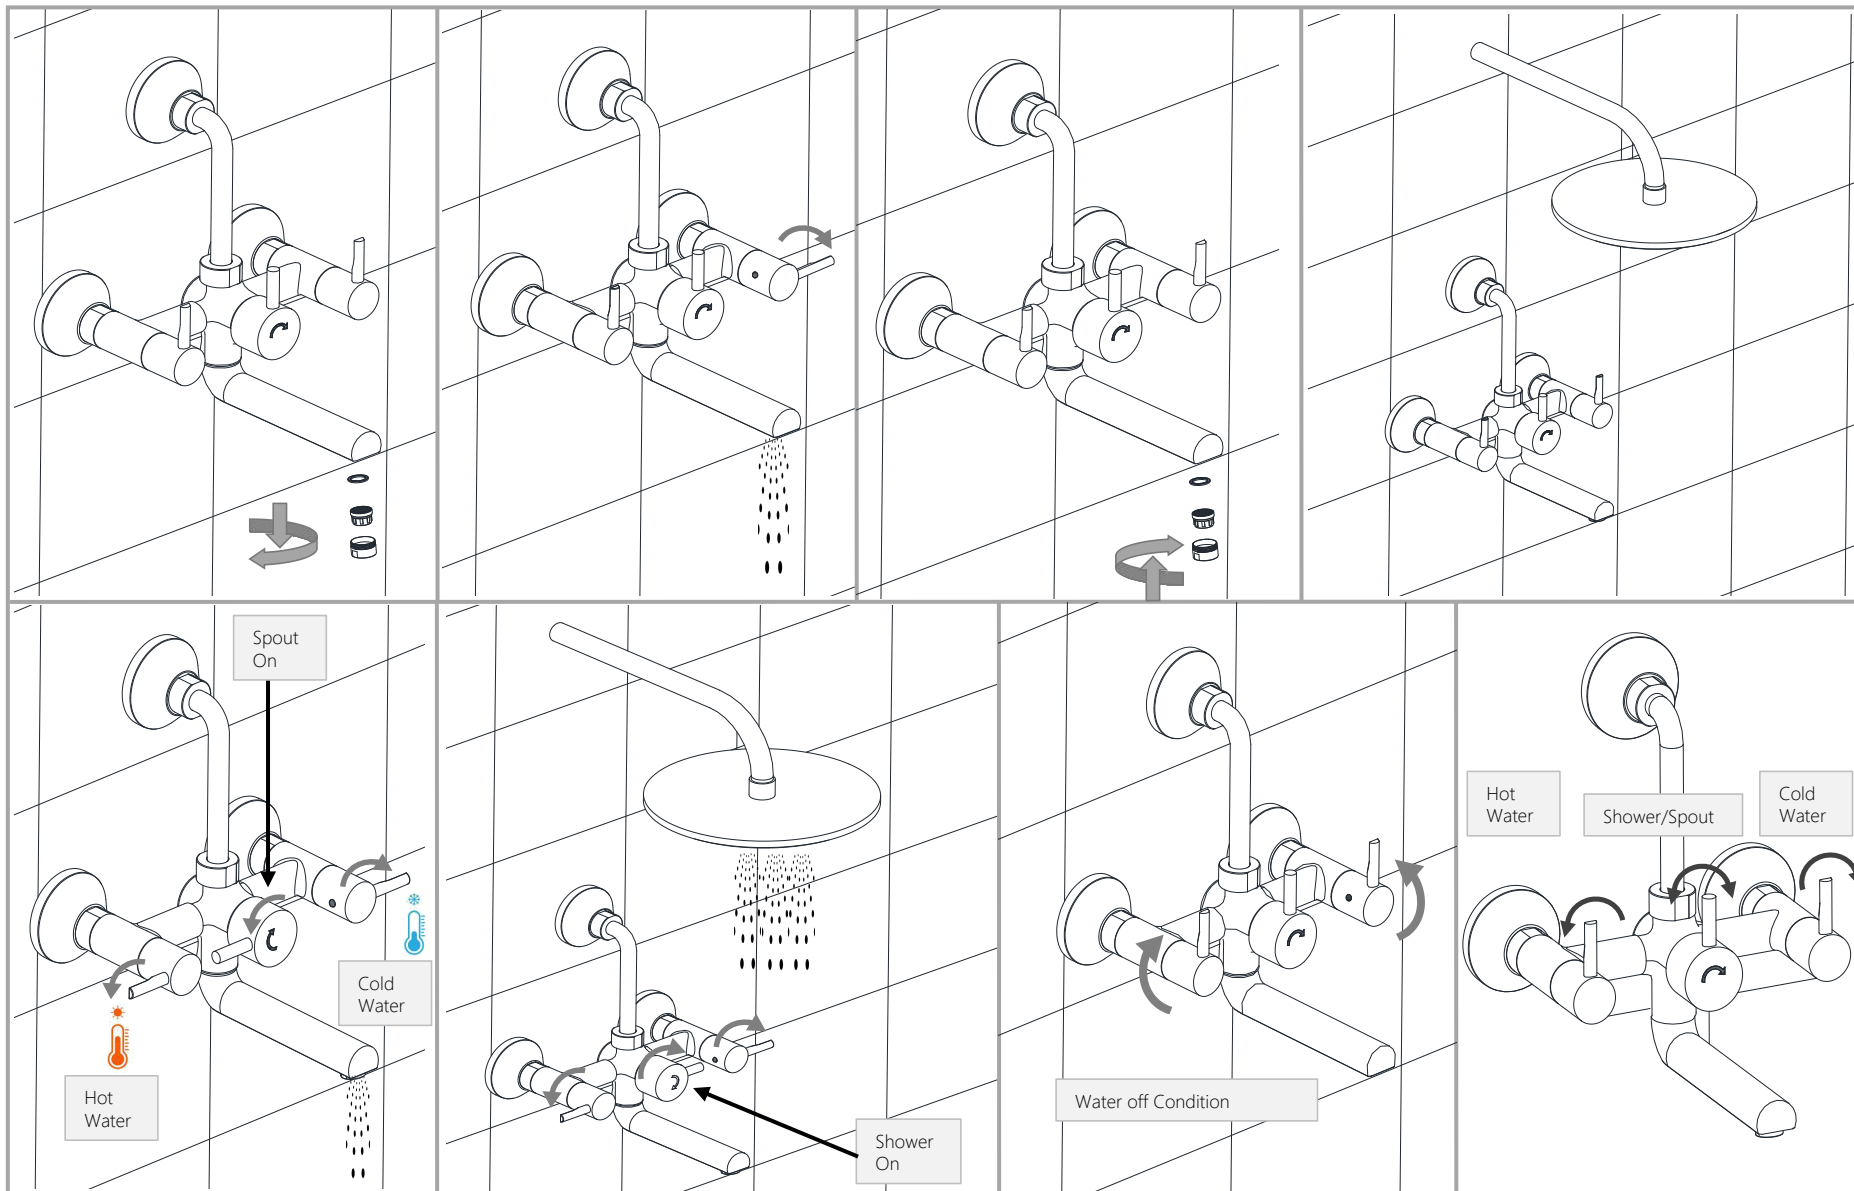
5°

TEMP.& WATER PRESSURE REQUIREMENTS
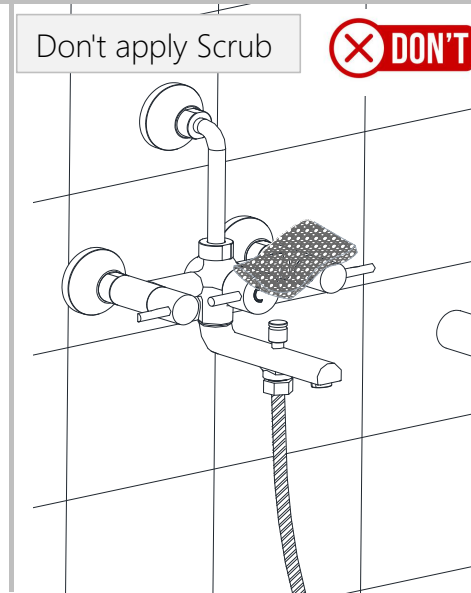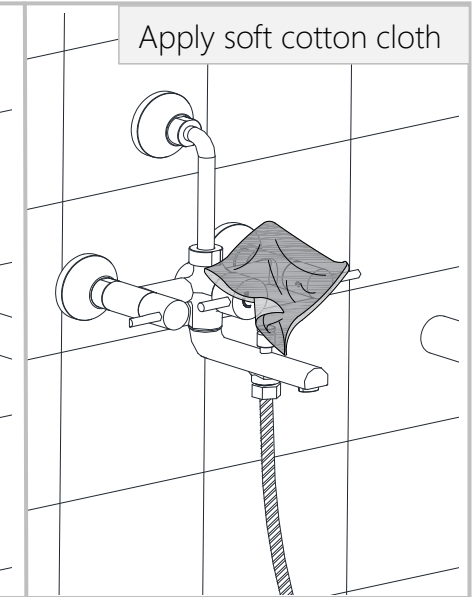
Working Pressure: 1~3 bar

Required Temperature: 5-65℃

Note: Above are the recommended values for getting Conventional Output.

HOW TO INSTALL

A

Check depth of Threded Hole First.

B

Cut extra Thread Length before inserting Nipple if Requird.

C De-burr cutting edges.

D

E

160±1.0

F

G

HOW TO OPERATE

Spout On

Cold Water

Hot Water

Shower On

Water off Condition

Hot Water

Shower/Spout

Cold Water

CLEANING INSTRUCTIONS

Apply soft cotton cloth

LIQUID SOAP PH-5-7

Apply soft cotton cloth

WATER

DON'T

POWDER SOAP

Don't apply Scrub

DON'T
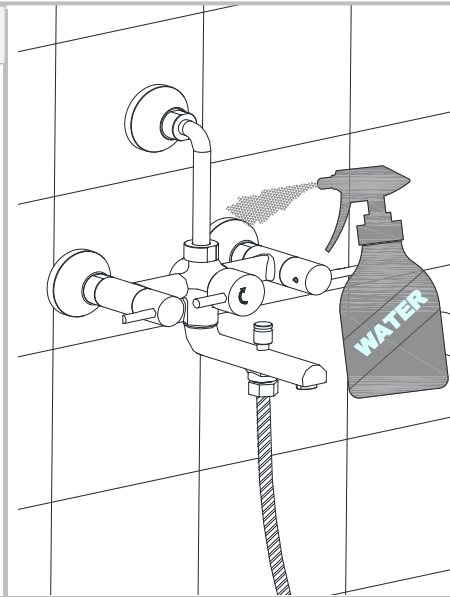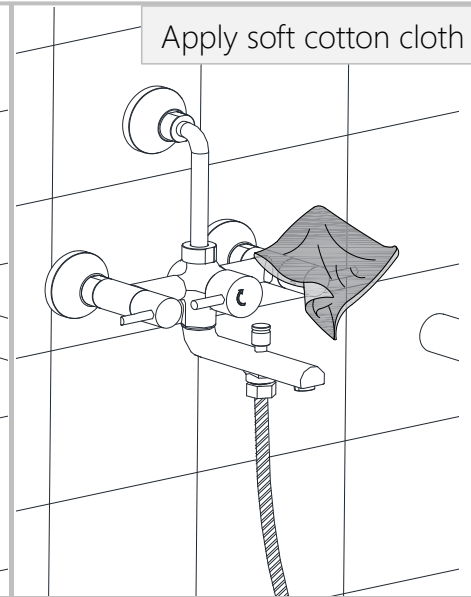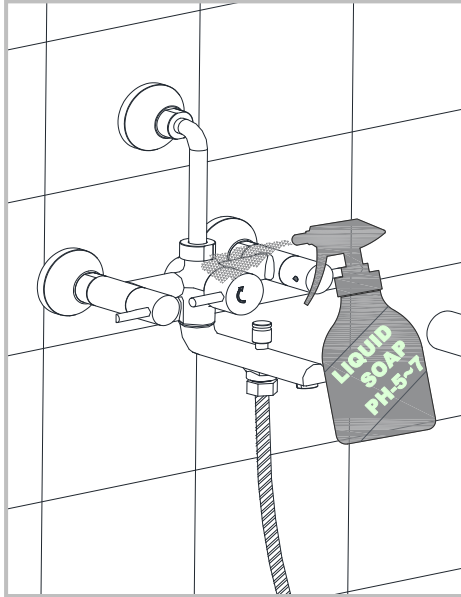
Steps & Cleaning agents requirements for Aerator Cleaning.

DE-SCALE

SOAP

| Aerator | 1 hour Dip | De-Scale Water | Liquid Soap PH-5-7 |