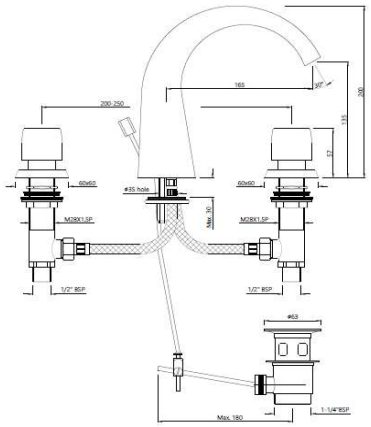

| | |
|---|---|
| **Product Code** | ARC-CHR-87191 |
| **Description** | 3 hole Basin Mixer with pop-up-waste |
| **Flow Rate** | 14.38 LPM @ 3 bar |
| **Recommended Water Pressure** | 0.5 Bar - 5 Bar |
| **Brass Specification in Percentage** | **Brass Ingots as per IS:1264-1997**<br>Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder)<br><br>**Brass Rod as per IS:319-1989**<br>Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder) |
| **Cartridge Specification** | Fittings : Components have WRAS Approved for food grade conformity with Brass Housing and Spindle<br>Life Cycle EN 200: 200,000 cycles (Standard)<br>- 5.0 LAC Cycles as per EN 200* |
| **Accessories incl.** | Pop-up waste 1¼“ |
| **Water Tightness** | 16 bar (Pass) |
| **Pressure Resistance** | 25 bar (Pass) |
| **Finish** | Plating: Nickel-10.0 micron Chromium-0.3 micron<br>Salt Spray (500 hrs + Validated)<br>Adhesion (Pass) |
| **Available Colour Finishing** | Antique Bronze (ABR), Antique Copper (ACR), Black Chrome (BCH), Black Matt (BLM), Graphite (GRF) & Stainless Steel Finish (SSF) |
| * As per in-house testing done on automatic life cycle testing machine made by Giussain, Italy | |
| DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. 10% variation in flow rate may be possible. Jaquar reserves the right to make the necessary amendments at any time without prior notice. | |